


HENSHAW CUBE CHAMBER SPECIFICATIONS



Front View

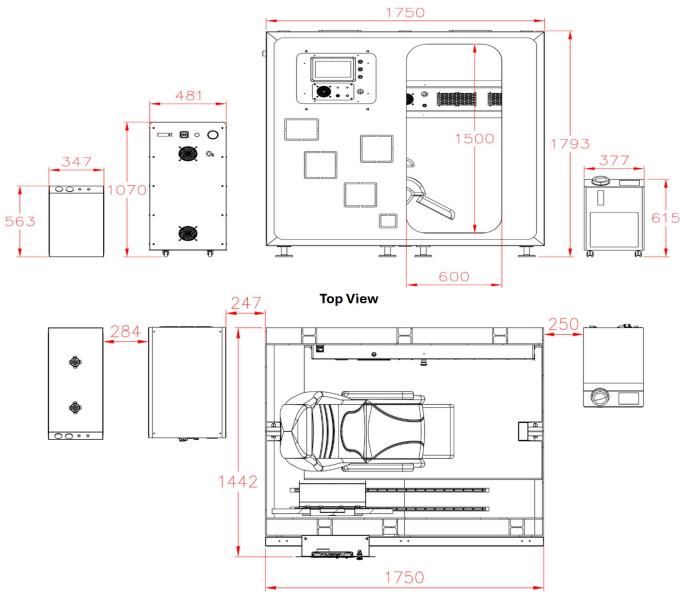

CAPACITY:	OVERALL LENGTH:	MAX. OPERATING PRESSURE:
1 Person (1 seat)	1750 mm	2.0 ATA (1 bar)
2 Person (2-seats) – Optional		
MATERIAL:	OVERALL WIDTH:	DESIGN TEMPERATURE:
Steel Pressure Vessel	1442 mm	0°C to 38°C
SHAPE AND DESIGN:	HEIGHT:	AIR PRESSURIZATION:
2 module cube shape, designed to fit any standard doorway and space	1793 mm	3.45 bar to 7.2 bar
MODULE LENGTH	WEIGHT:	AIR SUPPLY FLOW:
770 mm	1550 kg	250 LPM
MINIMUM INSTALLATION FLOOR SIZE:	INTERNAL LENGTH:	BIBS OXYGEN SUPPLY:
4400 mm x 3000 mm	1731 mm	3.2 bar to 4.0 bar
	INTERNAL VOLUME:	VENTILATION RATE:
	5.8 m ³	150 LPM
EMERGENCY DECOMPRESSION RATE:	2.0 ATA to 1 ATA in 90 sec.	·

The above mentioned dimensions are based on the 1-Person Chamber and subject to any changes made by the manufacture.